

□35mm

两相混合式步进电机 2-Phase Hybrid Stepper Motor



■ 通用技术条件 GENERAL SPECIFICATIONS

步距精度 Step Angle Accuracy	电阻精度 Resistance Accuracy	电感精度 Inductance Accuracy	温 升 Temperature Rise	环境温度 Ambient Temperature	绝缘电阻 Insulation Resistance	耐 压 Dielectric Strength	径向跳动 Allowable Radial Load	轴向跳动 Allowable Thrust Load
± 5%	±10%	±20%	80°C Max.	-20°C ~ +50°C	100MΩMin 500VDC	500V AC 1minute	0.02mm Max. (450g load)	0.08mm Max. (450g load)



■ 技术参数 SPECIFICATIONS

电机型号 Motor Model	步距角 Step Angle (°)	机身長 Length (mm)	额定电压 Voltage (V)	额定电流 Current (A/phase)	相电阻 Resistance (Ω /phase)	相电感 Inductance (mH/phase)	保持扭矩 Hold Torque (mN.m)	转动惯量 Rotor Inertia (g.cm ²)	引线数 Leads	电机重量 Weight (kg)
35HS26-03A5-21	1.8	26	7.28	0.28	26	27	70	10	4	0.13
35HS34-10A5-21		34	2.4	1.0	2.7	4.3	140	14	4	0.18

*以上仅为代表性产品，派生产品可根据客户要求制作。

*Note: We can manufacture products according to customer's requirements.

■ 外形尺寸(单位: mm) DIMENSIONS (Unit:mm)

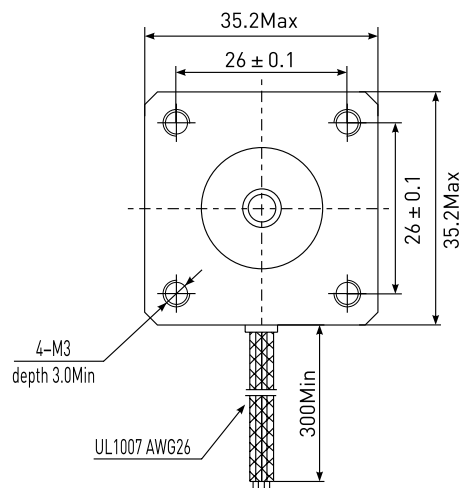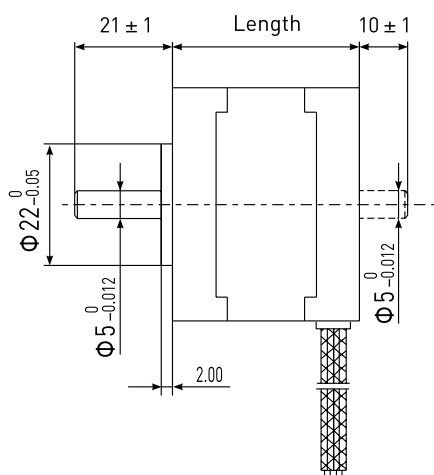

※本尺寸适用于双出轴类型，忽略虚线部分则是单出轴类型。

■ 接线图 WIRING DIAGRAM

